




#365

ETERNA-FLASH™



ALL WEATHER ALL SEASON SBS FLASHING CEMENT

- For Use 365 Days/Year
- All Weather/All Season Use
- E-Z Spread Formula
- Unmatched Wet or Dry Surface Adhesion
- Ultimate Rubberized Mastic
- Excellent for Flashing or Flat Applications

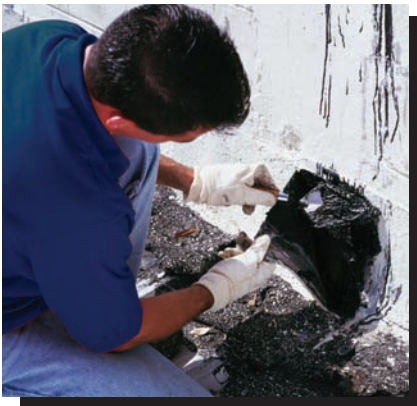

APOC® , "TESTED BEST" BY LEADING ROOFING CONTRACTORS

APOC® 365 ETERNA-FLASH™ All Weather/All Season, SBS Flashing Cement is a high performance flashing cement specially formulated for the professional roofer. APOC® 365 is an extremely versatile modified mastic that provides superior adhesion to wet surfaces and even adheres under water. APOC® 365 ETERNA-FLASH™ is manufactured with select asphalt, synthetic rubber, solvent and fibers to provide an 'E-Z Spread' durable patching compound under the harshest weather conditions. APOC® 365 is the ultimate repair compound and can be used to repair splits, seams, cracks and holes in spudded gravel, mineral surfaced cap sheet and smooth surface asphalt roofs and shingle roofs. It will seal areas around chimneys, vent pipes, gravel guards, down spouts, cracks in concrete and control joints on roofs. APOC® 365 is also an excellent utility mastic for use below grade in foundation damp-proofing.

DON'T REPLACE IT. RESTORE IT.™

FL-1073

AP 365



ETERNA-FLASH™ ALL WEATHER/ ALL SEASON RUBBERIZED FLASHING CEMENT Data Sheet

COMPLIANCE: ASTM D 6511, Fed Spec. SS-C-153 C, ASTM D 4586. California products meet L.A. County A.P.C.D. (Rule #102). Miami-Dade Approved.

DESCRIPTION: APOC® 365 ETERNA-FLASH™ All Weather/All Season Rubberized Flashing Cement is a high performance flashing cement specially formulated for the professional roofer. APOC® 365 is an extremely versatile modified mastic that provides superior adhesion to wet surfaces and even adheres under water. APOC® 365 ETERNA-FLASH™ is manufactured with select asphalt, synthetic rubber, solvent and fibers to provide an 'E-Z Spread' durable patching compound under the harshest weather conditions. APOC® 365 is the ultimate repair compound and can be used to repair splits, seams, cracks and holes in spudded gravel, mineral surfaced cap sheet, smooth surface asphalt roofs and shingle roofs. It will seal areas around chimneys, vent pipes, gravel guards, down spouts, cracks in concrete and control joints on roofs. APOC® 365 is also an excellent utility mastic for use below grade in foundation damp-proofing.

PREPARATION: All surfaces must be clean, have proper drainage and be free of surface rust and any other foreign matter. Not recommended for application to vertical surfaces during extreme hot weather conditions. Product formulated to be used year round. After a minimum of 45 days cure time, apply a reflective roof coating. This will greatly extend the life of the roof. Clean tools with paint thinner or mineral spirits.

APPLICATION: Protective clothing and eye wear should be used during application of these products. Apply with a trowel or putty knife. Work material to an even consistency over and into the area to be repaired. Apply 1/8" thick, two or three inches beyond the problem area. Extra material is not better. Too thick of an application will result in cracking. It is highly recommended to reinforce the repair with a strip of APOC Fabric. Form a feathered edge with cement where chimney's, vent pipes, and other projections meet the roof line. Embed fabric into the cement and cover with a second layer of cement. Embedding fabric is required for large tilt up buildings that experience movement or when applied to metal surfaces that experience expansion and contraction from large temperature fluctuations. Coverage rate is approximately 12 1/2 sq. ft. per gallon when applied 1/8" thick. DO NOT HEAT OR THIN.

PRECAUTIONS: Protective clothing and eyewear should be used during application of these products. When transporting this product, ensure that lid is tight and pail secure and upright. Do not allow pail to tumble as this may cause lid to loosen and leakage to occur. Do not transport on passenger seats or inside the passenger compartment of any vehicle. Store product in the cargo area of vehicle, and secure over protective cloths to prevent damage due to accidental spills. Do not store at temperatures above 100°F. This manufacturer also disclaims liability for flat surface application where poor drainage or ponding water may prevail. Do not reuse empty containers. Do not use in drinking water or food systems.

REGULATORY/ENVIRONMENTAL CHARACTERISTICS

Volatile Organic Compound	250 g/l max (2.1 lbs./gal.)
HMS Rating	H-1, F-2, R-O, PP-X
RCRA Hazardous Substances	Yes, D001
SARA Title III listing:	RQ Value 100 lbs.
Sec. 302 Extremely Hazardous Substances	No
CERCLA Hazardous Substances	No
Sec. 313 Toxic Chemicals	No

TYPICAL PHYSICAL & PERFORMANCE CHARACTERISTICS

Weight Per Gallon	9.6-10.6 lbs.
Residue by Evaporation	81.0 min.
Adhesion Underwater	Excellent
Combustible Solvents	Mineral Spirits
Consistency	Trowel
Cure Time (50% Relative Humidity, 70°F)	4-8 hours
Full Cure (50% Relative Humidity, 70°F)	24-48 hours
Application Temperatures	50° - 120°F
Flammability	105°F
Clean-up Tools	Paint Thinner, Mineral Spirits

Approx. Shipping Weights: (Note: All approx. weights include container.)

1 gallon (3.8L)	10 lbs.
(6) 1 gallon containers/case	62 lbs.
3 gallons (11.4L)	31 lbs.
5 gallons (18.9L)	53 lbs.

CAUTION: HARMFUL OR FATAL IF SWALLOWED. EYE, SKIN AND RESPIRATORY IRRITANT. CAUTION: COMBUSTIBLE MIXTURE. CONTAINS PETROLEUM DISTILLATE. N.Y.F.D. C of A # 4792

Contains Petroleum Distillate. Keep away from heat, sparks and open flame. If swallowed DO NOT induce vomiting. Call physician immediately. In case of: Eye contact - flush with plenty of warm water; Skin contact - wash thoroughly with soap and water; Irregular or stopped breathing - administer oxygen, give artificial respiration and get medical attention immediately. Avoid prolonged breathing of vapor or spray mist. (NIOSH/MSHA TC 23C or equivalent).

CALIF. PROP. 65 • CHEMICAL WARNING (CALIFORNIA HEALTH AND SAFETY CODE #25249.5 ET SEQ). WARNING: This product contains chemicals known to the State of California to cause cancer, birth defects or reproductive harm. Use proper protection and adequate ventilation, when using product.

VOC/VOS - 250 g/l max. (2.1 lbs./gal.)

PETROLEUM ASPHALT	C.A.S.# 8052-42-4
FILLER	C.A.S.# 1317-65-3
MINERAL SPIRITS	C.A.S.# 8052-41-3
CELLULOSE FIBER	C.A.S.# 9004-34-6
Product is asbestos free	

©2005 Gardner Asphalt Corporation
Manufactured by / Fabricado por:
Gardner Asphalt Corporation
P.O. Box 5449, Tampa, FL 33675



WARRANTY AND DISCLAIMER:

For limited warranty and disclaimer information, contact Gardner Asphalt at www.apoc.com or call: East Coast (813) 248-2101, West Coast (562) 423-6471.

See MSDS for more info



Gardner Asphalt Corporation • P.O. Box 5449 • Tampa, Florida 33675-5449
Phone: (813) 248-2101 • Fax (813) 248-6768 • www.gardnerasphalt.com